
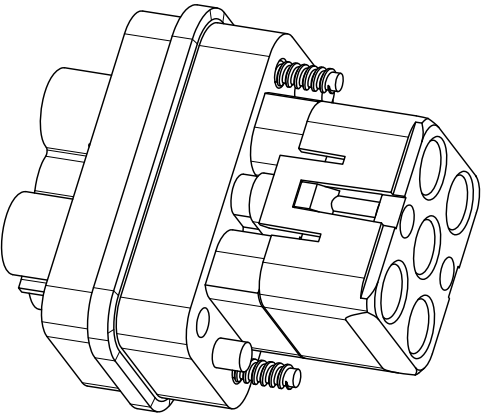
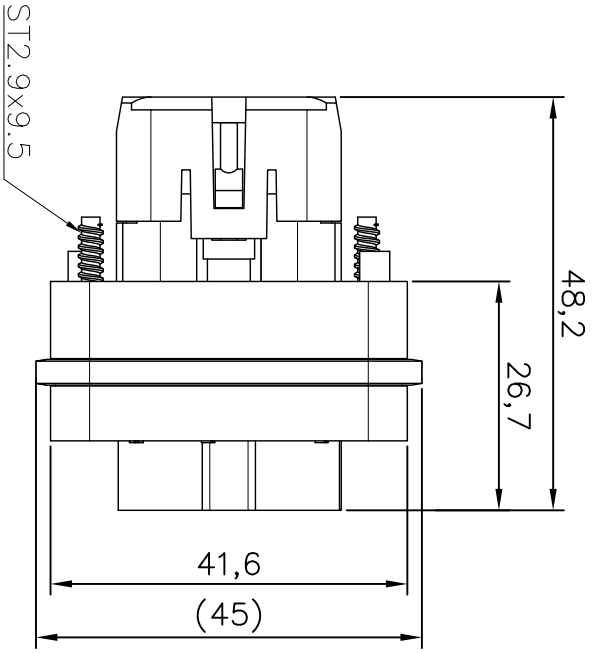


REVISIONS				
REV	ECN	DESCRIPTION	DATE	DRFT

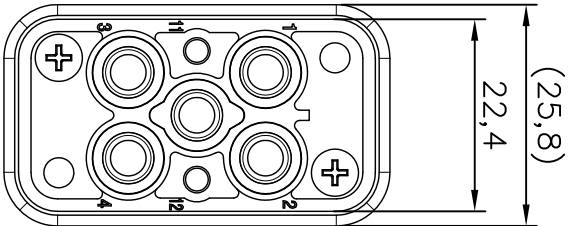

- 技术参数:
- 插芯:
- 插针数: 4/2+PE
 - 额定电流:
 - 电力区: 40A
 - 信号区: 10A
 - 额定电压:
 - 电力区:
 - 400V (相对地额定电压)
 - 690V (相间额定电压)
 - 信号区: 250V
 - 额定脉冲电压:
 - 电力区: 6kV
 - 信号区: 4kV
 - 污染等级: 3
 - 依据UL/CSA的额定电压: 600/250V
 - 绝缘阻抗: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL94的阻燃等级: V0
 - 可插拔次数: ≥ 500
- 插针:
- 接线方式: 冷压连接
 - 材料: 铜合金
 - 表面处理: 镀金/镀银
 - 接触电阻: $\leq 0.3\text{m}\Omega$
 - 线径范围:
 - 强电针: 1.5–6mm² (16–10 AWG)
 - 信号针: 0.14–2.5mm² (26–14 AWG)
 - 最大绝缘直径:
 - 强电针: 5mm
- 工具:
- 冷压钳:
 - TL02G (0.14–4mm²)
 - TL02–0G (1.5–6mm²)
 - 退针器:
 - TL00 (10A退针器)
 - TL06G (40A退针器)

产品代号 Part Code: HQ-004/2-MC		图号 Drawing No:	/
--------------------------------	--	-------------------	---

Date: 2021.07.24	Scale: 2:1	REV: HK-1	Weight: /	Qty: /	Drawn: Tang	SHEET: 1/1
All Dimensions in mm Original Size DIN A 4						